




TAILLIGHT

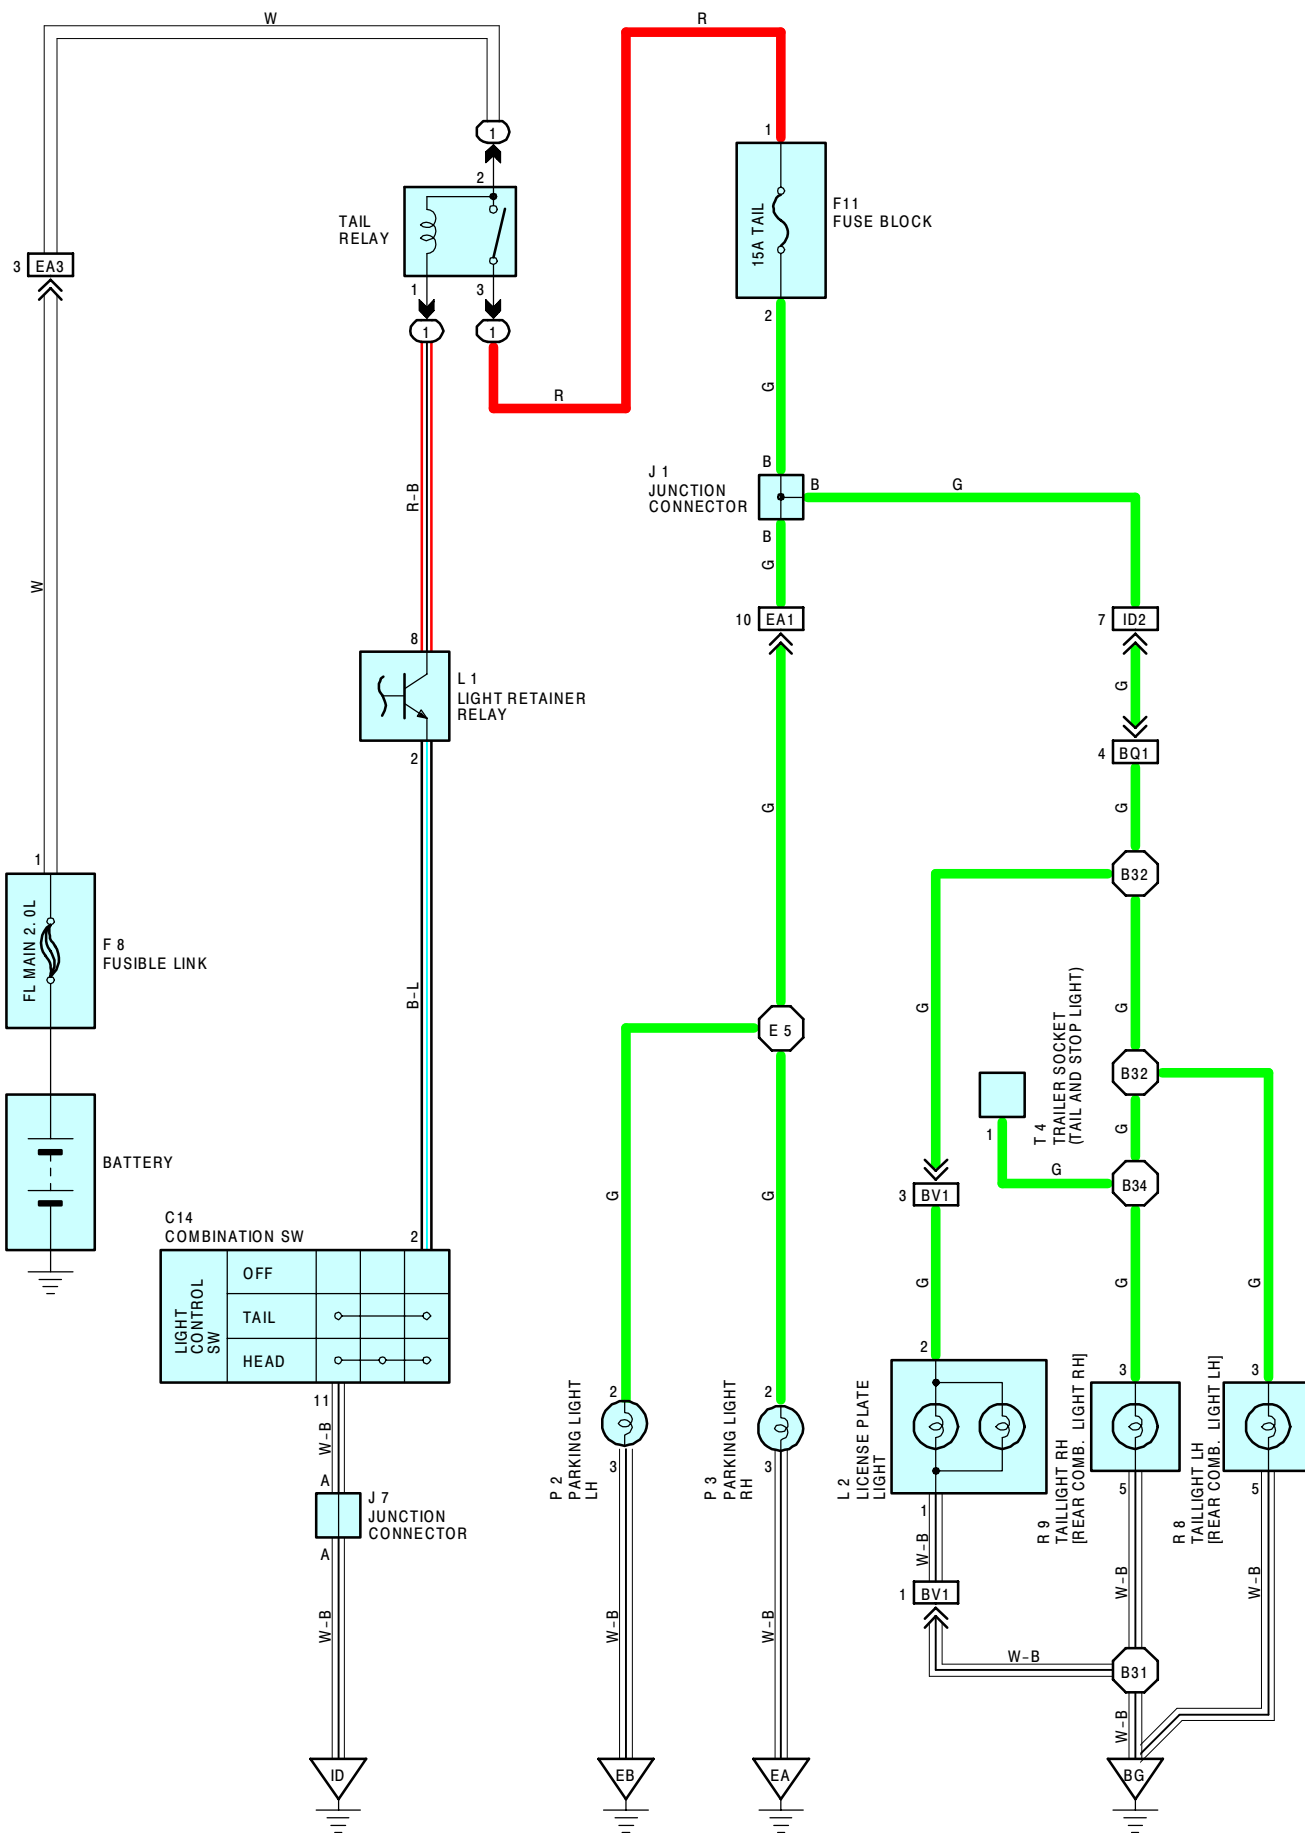

SERVICE HINTS	
TAIL RELAY (1) 2- (1) 3	: CLOSED WITH THE LIGHT CONTROL SW AT TAIL OR HEAD POSITION (WHEN THE LIGHT AUTO TURN OFF SYSTEM DOES NOT OPERATE)

O



CODE	SEE PAGE	RELAY BLOCKS (RELAY BLOCK LOCATION)
1	20	R/B NO. 1 (LEFT KICK PANEL)

CODE	SEE PAGE	GROUND POINTS LOCATION
EA	30	FRONT SIDE OF RIGHT FENDER
EB	30	FRONT SIDE OF LEFT FENDER
ID	32	LEFT KICK PANEL
BG	34	LOWER BACK PANEL CENTER

C14 BLACK


F 8




Diagram of a key with a circular head and a rectangular shaft.

F11

(SEE PAGE 20)



(HINT : SEE PAGE 7)



L 1



•	2	•		
X	•	•	•	8

L 2



A diagram of a two-chambered heart, showing two ventricles labeled 1 and 2. The heart is symmetrical with a central septum dividing the two chambers.

P 2, P 3 G



A diagram of a three-ported device, possibly a valve or a small container, with three ports labeled X, 2, and 3. The device has a central body with three distinct ports on top. The left port is labeled 'X', the middle port is labeled '2', and the right port is labeled '3'.

R 8, R 9



T 4 BLACK



The diagram shows a 4-hole punch card. The top section, which would normally contain a 4-digit number, is shaded black. Below this, the card is divided into two columns. The left column contains the number '1' in the top position and a dot in the bottom position. The right column contains a dot in the top position and a dot in the bottom position.

T 4 BLACK

(HINT : SEE PAGE 7)