


DTC	P1500	Starter Signal Circuit Malfunction
-----	-------	------------------------------------

CIRCUIT DESCRIPTION

When the engine is cranked, the intake air flow is slow, so fuel vaporization is poor. A rich mixture is therefore necessary in order to achieve good startability. While the engine is being cranked, the battery positive voltage is applied to terminal STA of the ECM. The starter signal is mainly used to increase the fuel injection volume for the starting injection control and after-start injection control.

WIRING DIAGRAM

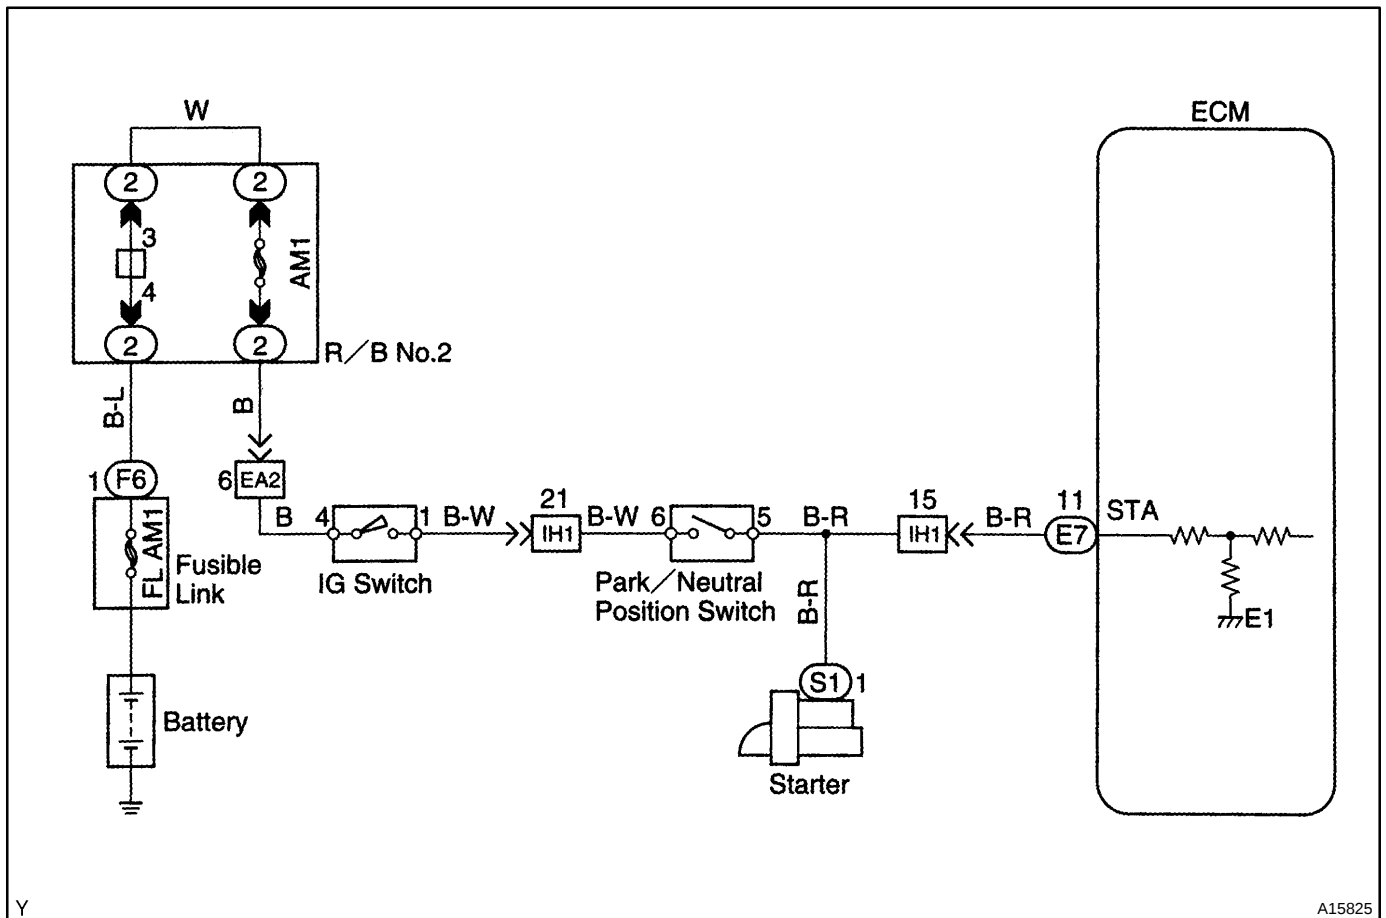

Y

A15825

INSPECTION PROCEDURE

HINT:

This diagnostic chart is based on the premise that the engine is cranked normally. If the engine is not cranked, proceed to the matrix chart of problem symptoms on page [DI-19](#).

1	Connect TOYOTA hand-held tester and check STA signal.
----------	--

PREPARATION:

- (a) Connect the TOYOTA hand-held tester to the DLC3.
- (b) Turn ignition switch ON and push TOYOTA hand-held tester main switch ON.

CHECK:

Read STA signal on the TOYOTA hand-held tester while starter operates.

OK:

Ignition Switch Position	ON	START
STA Signal	OFF	ON

OK

Proceed to next circuit inspection shown on matrix chart (See page [DI-19](#)).

NG

2	Check for open in harness and connector between ECM and starter relay (See page IN-28).
----------	--

NG

Repair or replace harness or connector.

OK

Check and replace ECM
(See page [IN-28](#)).