

## BRAKE PEDAL ON-VEHICLE INSPECTION

BR0JB-04

### 1. CHECK PEDAL HEIGHT

**Pedal height from asphalt sheet:**

**183.7 – 193.7 mm (7.232 – 7.626 in.)**


If the pedal height is incorrect, adjust it.

### 2. IF NECESSARY, ADJUST PEDAL HEIGHT

- Remove the No.1 under panel, No.1 safety pad, finish panel, and No.2 heater to register duct.
- Disconnect the connector from the stop light switch.
- Loosen the stop light switch lock nut and remove the stop light switch.
- Loosen the push rod lock nut.
- Adjust the pedal height by turning the pedal push rod.
- Tighten the push rod lock nut.

**Torque: 25 N·m (260 kgf·cm, 19 ft·lbf)**

- Install the stop light switch.
- Push in the brake pedal 5 – 15 mm (0.20 – 0.59 in.), turn the stop light switch to lock the nut in the position where the stop light goes off.
- Connect the connector to the stop light switch.
- After installation, push in the brake pedal 5 – 15 mm (0.20 – 0.59 in.), check that stop light lights up.
- After adjusting the pedal height, check the pedal freeplay.
- Install the No.1 under panel, No.1 safety pad, finish panel, and No.2 heater to register duct.

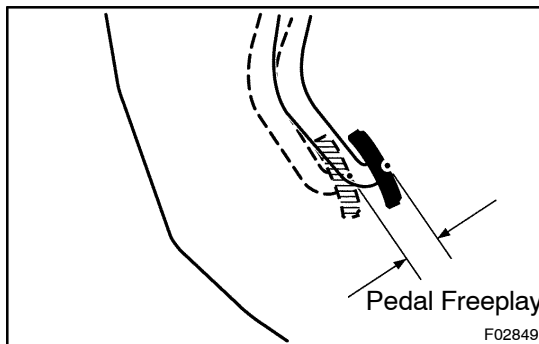

### 3. CHECK PEDAL FREEPLAY

- Stop the engine and depress the brake pedal more than 40 times until there is no more pressure left in the booster.
- Push in the pedal by hand until the second point of resistance begins to be felt, then measure the distance, as shown.


**Pedal freeplay: 1.0 – 6.0 mm (0.039 – 0.236 in.)**

If incorrect, check the stop light switch clearance. If the clearance is OK, then troubleshoot the brake system.

**Stop light switch clearance: 1.0 mm (0.039 in.)**

**HINT:**

The freeplay to the 1st point of resistance is due to the play between the clevis, pedal link and pin. It is 1.0 – 6.0 mm (0.039 – 0.236 in.) on the pedal.

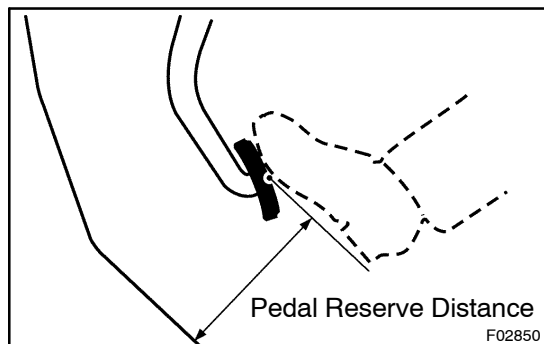**4. CHECK PEDAL RESERVE DISTANCE**

- (a) Remove the floor carpet.
- (b) Release the parking brake.

With the engine running, depress the pedal and measure the pedal reserve distance, as shown.

**Pedal reserve distance at 490 N (50 kgf, 110.1 lbf):**

**More than 116 mm (4.57 in.)**

If the reserve distance is incorrect, troubleshoot the brake system.